


ISO 15481 / DIN 7504 M, Self-tapping screw M form round head, ST 3,9x13, ST, zinc-plated, standard, 5 µm, Zn5/An/T0, H 2

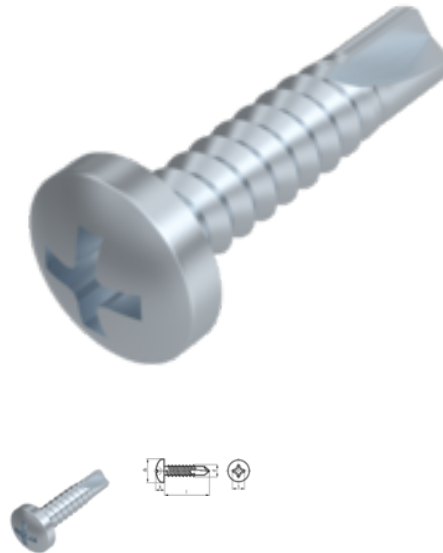

Article number
20750473913

EAN
None

Weight in kg
0.001

Customs number
73181491

Material
Steel

Quality
ST

Coating
zinc-plated, standard, 5 µm, Zn5/An/T0

Force application type
Philipps cross recess

Diameter
3,9 mm

Length
13 mm

Product details

Raised head according to DIN 7981.

Material	Steel
Force application type	Philipps cross recess
Length	13 mm
Total length l	13 mm
Norm	ISO 15481
Diameter	3.9 mm
Quality	ST
Force application	H 2
Height of the head k	2.8 mm
Coating	zinc-plated, standard, 5 µm, Zn5/An/T0

Diameter of the head dk	7.5 mm
Diameter d	3.9 mm

Benefits

Verringerte Montagezeit durch die Bohrspitze der Schraube.

Remarks

Standard was withdrawn. DIN corresponds to ISO 15481 (DRM 3,9 mm not contained in ISO).

Application

Wärmebehandelte Bohrschrauben mit Blechschraubengewinde, die eine Bohrspitze besitzen, mit der sie bei Montage ihr Kern Loch selbst bohren und dann mit dem anschließenden Gewindeteil ihr Gegengewinde spanlos oder spanend selbst formen.

Geeignet für Stahl und Weichmetalle im Metallbau, Solar, Holzbau.

Product variants

Diameter (mm)	2,9	3,5	3,9	4,2	4,8	5,5	6,3
Length (mm)							
9,5	•	•	•				
13	•	•	•	•	•		
16	•	•	•	•	•		•
19		•	•	•	•	•	•
22		•	•	•	•	•	•
25		•	•	•	•	•	•
32		•	•	•	•	•	•
38				•	•	•	•
45			•	•	•		•
50			•	•	•	•	•
60					•	•	•
70					•	•	•
80					•		•
90					•		•
100					•		•
120					•		