


# ISO 15481 / DIN 7504 M, Self-tapping screw M form round head, ST 4,2x25, ST, zinc-plated, standard, 5 µm, Zn5/An/T0, H 2

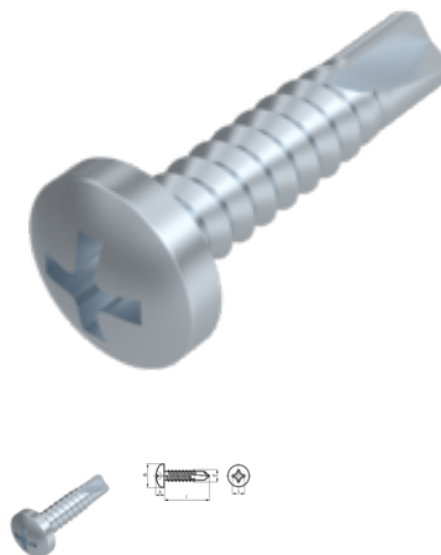

**Article number**  
20750474225

**EAN**  
None

**Weight in kg**  
0.003

**Customs number**  
73181491

**Material**  
Steel

**Quality**  
ST

**Coating**  
zinc-plated, standard, 5 µm, Zn5/An/T0

**Force application type**  
Philipps cross recess

**Diameter**  
4,2 mm

**Length**  
25 mm

## Product details

Raised head according to DIN 7981.

Material	Steel
Force application type	Philipps cross recess
Length	25 mm
Total length l	25 mm
Norm	ISO 15481
Diameter	4.2 mm
Quality	ST
Force application	H 2
Height of the head k	3.1 mm
Coating	zinc-plated, standard, 5 µm, Zn5/An/T0

Diameter of the head dk	8 mm
Diameter d	4.2 mm

## Benefits

Verringerte Montagezeit durch die Bohrspitze der Schraube.

## Remarks

Standard was withdrawn. DIN corresponds to ISO 15481 (DRM 3,9 mm not contained in ISO).

## Application

Wärmebehandelte Bohrschrauben mit Blechschraubengewinde, die eine Bohrspitze besitzen, mit der sie bei Montage ihr Kern Loch selbst bohren und dann mit dem anschließenden Gewindeteil ihr Gegengewinde spanlos oder spanend selbst formen.

Geeignet für Stahl und Weichmetalle im Metallbau, Solar, Holzbau.

## Product variants

Diameter (mm)	2,9	3,5	3,9	4,2	4,8	5,5	6,3
Length (mm)							
9,5	•	•	•				
13	•	•	•	•	•		
16	•	•	•	•	•		•
19		•	•	•	•	•	•
22		•	•	•	•	•	•
25		•	•	•	•	•	•
32		•	•	•	•	•	•
38				•	•	•	•
45			•	•	•		•
50			•	•	•	•	•
60					•	•	•
70					•	•	•
80					•		•
90					•		•
100					•		•
120					•		