

DIN 934, Hexagon nut with metric coarse thread, M 60, 8, zinc-plated, standard, 5 µm, Zn5/An/T0



Article number

24093460

Weight in kg

1.495

Customs number

73181699

Material

Steel

Quality


8

Coating

zinc-plated, standard, 5 µm, Zn5/An/T0

Diameter

60 mm

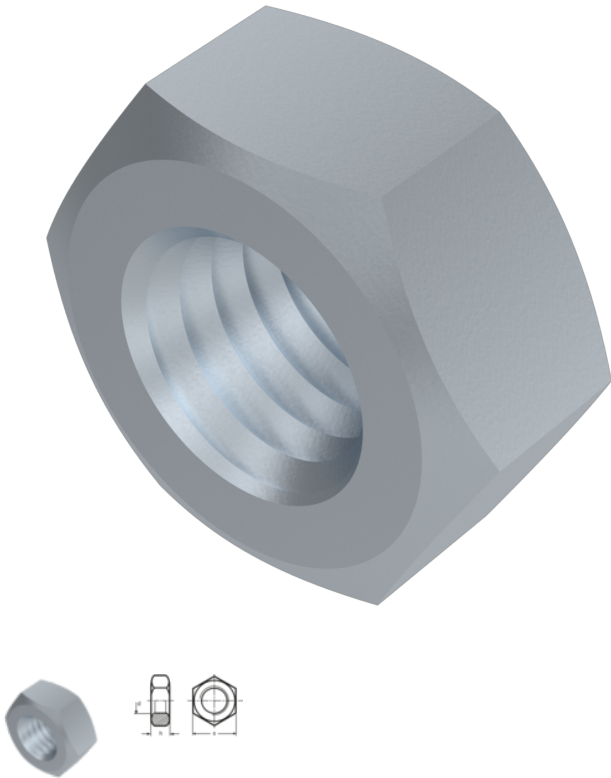

Product details

With metric coarse thread.

Material	Steel
Force application type	External hex
Height h	48 mm
Norm	DIN 934
Diameter	60 mm
Quality	8
Force application	SW 90
Coating	zinc-plated, standard, 5 µm, Zn5/An/T0
Diameter d	60 mm

Remarks

Standard was withdrawn. DIN similar to ISO 4032. Changed SW and height for ISO. Items are delivered according to DIN. For further sizes see ISO 4032.

Product variants

Coating	Geomet 500 B	HDG	pln	zinc flake, 480h, flZn/nc/TL µ0, 09 - 0,14	zinc-plated, standard, 5 µm, Zn5/An/T0	zinc-plated, thick layer, 5 µm, Zn5/Cn/T2 µ0,12 - 0,18	zinc-plated, thick layer, 8 µm, Zn8/Cn/T2 µ0,12 - 0,18
Diameter (mm)							
2			.		.	.	
2,5			.		.		.
3			.		.	.	
3,5					.		
4			.	.	.	.	
5			.	.	.	.	
6		.	.	.	.	.	
7			.		.		
8	.	.	.	.	.		.
10		.	.	.	.		.
12		.	.	.	.		.
14		.	.		.		.
16		.	.	.	.		.
18		.	.		.		.
20		.	.	.	.		.
22		.	.	.	.		.
24		.	.	.	.		.
27		.	.		.		
30		.	.		.		.
33			.		.		
36		.	.		.		
39			.		.		
42		.	.		.		
45			.				
48			.				
52			.		.		
56			.		.		
60			.	.	.		
64			.		.		
72			.				
80			.				