


ISO 15977 FAKKT blind rivet, dome head, 2,4x6, AL/ST, CR: 2-4

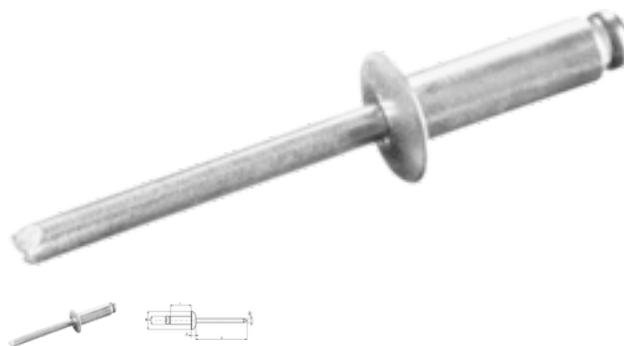

Article number
580000110324060

EAN
None

Weight in kg
0.001

Customs number
83082000

Quality
AL/ST

Coating
pln

Clamping range min.
2 mm

Clamping range max.
4 mm

Diameter
2,4 mm

Length
6 mm

Product details

| | |
|---------------------------|-----------|
| Material | Aluminium |
| Length | 6 mm |
| Length of rivet mandrel p | 26 mm |
| Norm | ISO 15977 |
| Tensile force | 500 N |
| Diameter | 2.4 mm |
| Bore hole diameter | 2,5 mm |
| Height of the head k | 0.8 mm |
| Coating | pln |
| Diameter of the head dk | 5 mm |
| Head type | dome head |
| Clamping range max. | 4 mm |
| Clamping range min. | 2 mm |

| | |
|------------------------------|-----------|
| Shear force | 300 N |
| Diameter of rivet mandrel dm | 1.37 mm |
| Material mandrel | Steel |
| Quality | AL/ST |
| Length of rivet sleeve l | 6 mm |
| Material sleeve | Aluminium |
| Diameter d | 2,4 mm |

Remarks

Standard DIN 7337 A was withdrawn. DIN similar to DIN EN ISO 15977.

Product variants

| Diameter (mm) | 2,4 | 6,4 |
|---------------|-----|-----|
| Length (mm) | | |
| 6 | • | |
| 10 | | • |