


ISO 15977 FAKKT blind rivet, dome head, 6,4x12, AL/ST, CR: 4-6

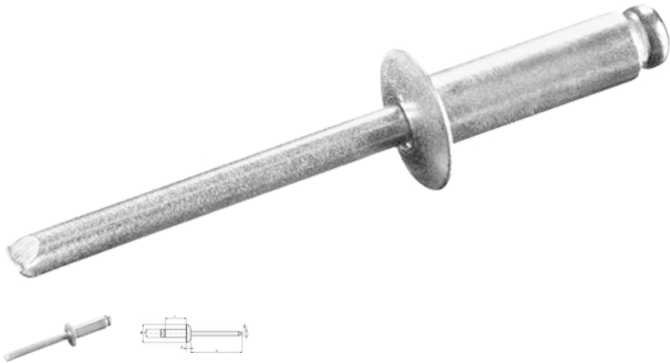

Article number  
580000110364120

Weight in kg  
0.006

Customs number  
83082000

Coating  
pln

Clamping range min.  
4 mm

Clamping range max.  
6 mm

Diameter  
6,4 mm

Length  
12 mm

Product details

|                           |           |
|---------------------------|-----------|
| Material                  | Aluminum  |
| Length                    | 12 mm     |
| Lenght of rivet mandrel p | 32 mm     |
| Norm                      | ISO 15977 |
| Tensile force             | 4090 N    |
| Diameter                  | 6.4 mm    |
| Height of the head k      | 2.2 mm    |
| Bore hole diameter        | 6,5 mm    |
| Coating                   | pln       |
| Diameter of the head dk   | 13 mm     |
| Head type                 | dome head |
| Clamping range max.       | 6 mm      |
| Clamping range min.       | 4 mm      |
| Shear force               | 3120 N    |

|                              |           |
|------------------------------|-----------|
| Diameter of rivet mandrel dm | 3.65 mm   |
| Material mandrel             | Steel     |
| Quality                      | AL/ST     |
| Lenght of rivet sleeve l     | 12 mm     |
| Material sleeve              | Aluminium |
| Diameter d                   | 6,4 mm    |

Remarks

Standard DIN 7337 A was withdrawn. DIN similar to DIN EN ISO 15977.

Product variants

| Diameter (mm) | 2,4 | 4,8 | 5 | 6,4 |
|---------------|-----|-----|---|-----|
| Length (mm)   |     |     |   |     |
| 8             | .   |     |   |     |
| 10            |     | .   | . |     |
| 12            |     |     |   | .   |