


DIN 985, hexagonal nut, M 5, 10, zinc-plated, standard, 5 μ m, Zn5/An/T0

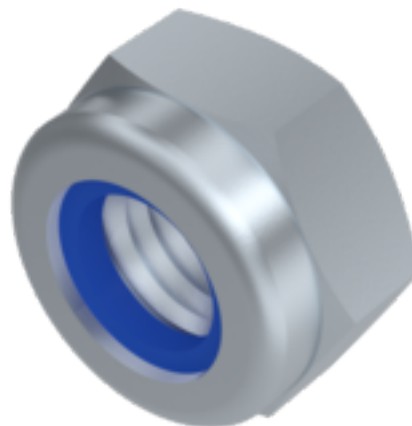

Article number
2509855

EAN
None

Weight in kg
0.001


Customs number
73181660

Material
Steel

Quality
10

Coating
zinc-plated, standard, 5 μ m, Zn5/An/T0

Diameter
5 mm



Product details

With polyamide locking insert, low profile form.

Material	Steel
Force application type	External hex
Height h1	3.2 mm
Height h	5 mm
Minimum height for recess km	2.8 mm
Norm	DIN 985
Diameter	5 mm
Quality	10
Force application	SW 8
Coating	zinc-plated, standard, 5 μ m, Zn5/An/T0
Diameter d	5 mm

Benefits

klemmende Wirkung des Polyamid-Einsatzes ermöglicht verlässliche Sicherung

Remarks

Standard was withdrawn. DIN corresponds to ISO 10511. Changed SW and height for ISO. Item is delivered according to DIN.
Attention: Possibility of hydrogen embrittlement acc. ISO 4042. For further questions, please contact us under: engineering@keller-kalmbach.com

Product variants

Coating	Zinc-nickel, thick layer, 8 µm, ZnNi8/Cn/T0	pln	zinc-plated, standard, 5 µm, Zn5/An/T0
Diameter (mm)			
4			•
5			•
6			•
8			•
10			•
12	•	•	•
14			•
16		•	•
18			•
20			•
22			•
24			•
30			•